


RPB Series



Ideal for medium to very large installations

Designed to stand the test of times

Easy maintenance and serviceability

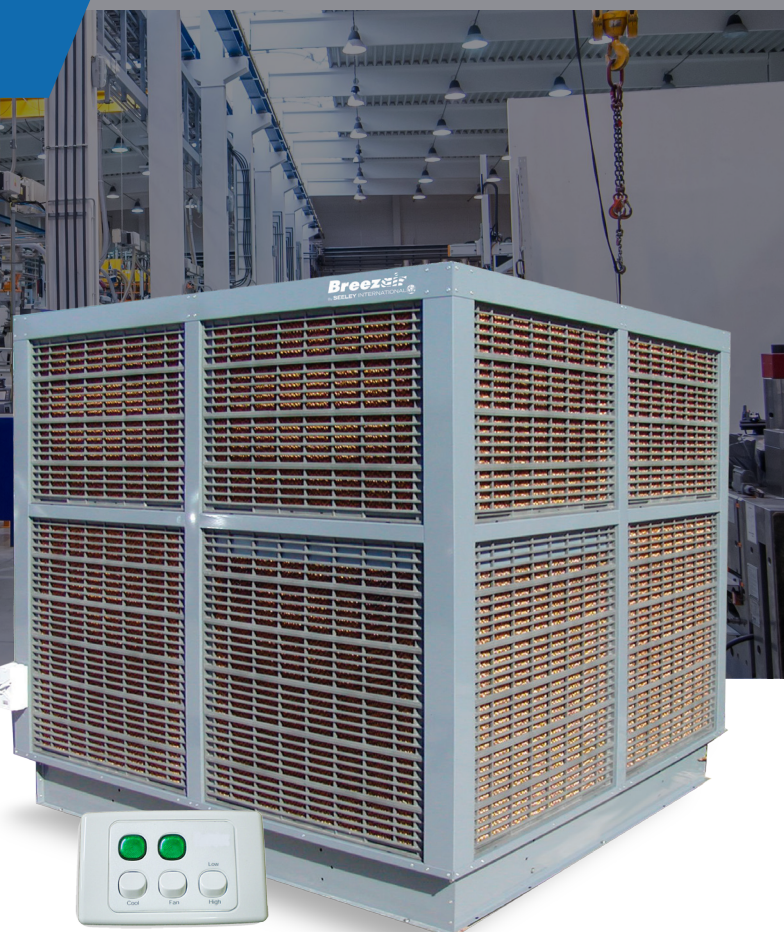

Water reservoir

- Rotational moulded in polyethylene to provide corrosion free long life and durability.
- Enhanced water distribution ensures an even water distribution and improved efficiency.



Fan motors

- Tropic proof two speed motors fitted as standard.
- All coolers are three phase and have manual re-set overload for added safety.



Water connection

- Industry standard connections (1/2 inch BSP) make installation quick and easy.



Optional extras

- Automatic water dumping feature

Why Breezair evaporative air conditioning for commercial and industrial use?



More than 40 years history in the commercial and industrial sector



Australia's number one choice for heavy industrial and commercial cooling



Suits any application, proven performer from small workshops to world's largest plants



Preferred choice of Mechanical Services Contractors, Engineers, Architects and Specifiers



Known for unmatched reliability, outstanding performance and cost effectiveness



Low maintenance and running costs year after year

Breakthrough technology

Mini-Cell[^] Chillcel[®] Pad Technology!

Dramatic improvement in cooling efficiency


Revolutionary new Mini-Cell structure provides a new development in cooling technology.

New enhanced small cell design, means that the Breezair range boasts a new cutting edge level of cooling capacity!

New pad formulation has resulted in having 25% more surface area dramatically improving cooling efficiency.

The only evaporative cooling pads fully manufactured in Australia to suit the harshest climates, and now, the absolute over-performer!

[^]Patent pending

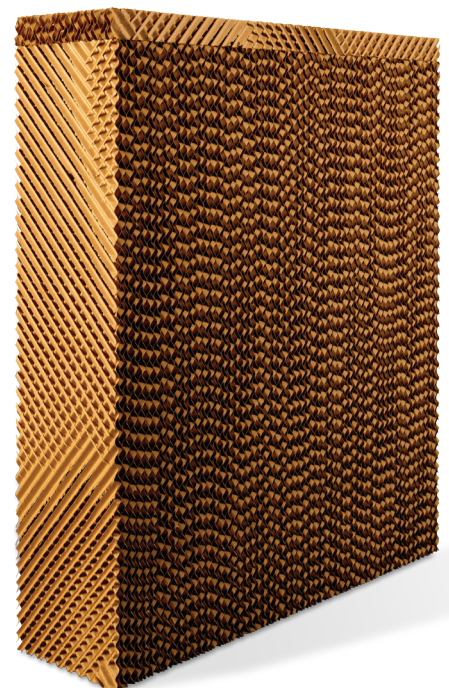

RPB Series

Specifications		RPB 600	RPB 700	RPB 900	RPB 1000	RPB 1200	RPB 1300	RPB 1400	RPB 1500	RPB 1800 (Top & down dis.)	RPB 1800 (Side dis.)		
Airflow (@ zero static)	High (m³/h)	21,096	25,920	31,716	35,604	41,292	45,900	50,688	54,180	64,440	58,680		
	High (cfm)	12,417	15,256	18,667	20,956	24,303	27,016	29,834	31,889	37,928	34,538		
	Low (m³/h)	14,040	16,632	21,600	23,850	27,720	30,762	33,966	36,018	43,387	42,804		
	Low (cfm)	8,263	9,789	12,713	14,037	16,315	18,106	19,991	21,199	25,537	25,193		
Cooling capacity (@ 80 Pa / 80% sat.	High speed (kW)	20.7	23.7	30.4	34.2	39.0	44.3	49.8	53.1	63.3	56.9		
Blower Wheel	Dia x width (mm)	760 x 635					820 x 800						
	Outlet (mm)	780 x 760					890 x 890						
Motor	Type	2 speed 3 phase											
	Speed (RPM)	1450/955											
	Rating (kW)	2.5:1.1	2.5:1.1	4.5:1.5	6.0:2.7	4.5:1.5	6.0:2.0	8.0:2.5	10.0:4.4	15.0:6.7	15.0:6.7		
	Current (amp)	5.0:4.0	5.0:4.0	8.5:5.3	15.5:7.5	8.5:5.3	11.7:6.6	16.2:7.0					
	Supply	415 V / 50 Hz 3 phase											
Pump	Type	Cent x 1	Cent x 1	Cent x 1	Cent x 2	Cent x 3	Cent x 3	Cent x 3	Cent x 3	Cent x 4	Cent x 3		
	Rating (W)	50											
	Flow Rate (l/m)	24											
Chillcel Cooling Pads	Size top (mm)	595 x 580 (6)			595 x 580 (8)	795 x 580 (6)				795 x 580 (8)	795 x 580 (6)		
	Size bottom (mm)	595 x 580 (6)			595 x 580 (8)	795 x 890 (6)				795 x 890 (8)	795 x 890 (6)		
	Area (m²)	4.14			5.52	7.0				9.4	7.0		
Water reservoir tank	Capacity (L)	55					100						



BREEZAIR

Direct Evaporative Air Conditioning

CLIMATE WIZARD

Indirect Evaporative Air Conditioning



P O Box 44776
Hawalli, Kuwait.32062
Tel : +965 97394739
Off: +965 22284227
Email : Jacobt@synergyunited.com

eurosales@seeleyinternational.com
uksales@seeleyinternational.com

Seeley International Europe (Italy) s.r.l.

Policiano 72M
52100 Arezzo Italy

eurosales@seeleyinternational.com

Phone: +39 0575 97189
Fax: +39 (0)575 1949971

Seeley International (UK) Pty Ltd

Unit 11 Byron Business Centre
Duke Street, Hucknall Nottingham
NG15 7HP United Kingdom

uksales@seeleyinternational.com

Phone +44 (0)115 9635630
Fax +44 (0)115 9635630